

Fig. VR9310

- Válvula esfera tripartida, roscadas ou para solda, classe de pressão 1000 PSI.

Bitola		Dimensões (mm) – Passagem Reduzida				
DN	NPS	A	B	C	ØP	Peso Kg
15	1/2"	60,0	44,0	95,0	9,1	0,265
20	3/4"	66,0	46,0	95,0	12,7	0,380
25	1"	79,0	55,0	115,0	17,5	0,585
32	1.1/4"	94,0	70,0	130,0	25,0	1,135
40	1.1/2"	103,0	74,0	130,0	30,5	1,740
50	2"	123,0	87,0	180,0	38,0	2,755
65	2.1/2"	143,0	96,0	180,0	49,0	4,640
80	3"	174,8	114,6	197,0	60,0	6,800
100	4"	195,7	161,0	222,5	75,0	10,870

Bitola		Dimensões (mm) – Passagem Plena				
DN	NPS	A	B	C	ØP	Peso Kg
6	1/4"	60,0	44,0	95,0	9,1	0,315
10	3/8"	60,0	44,0	95,0	9,1	0,295
15	1/2"	63,0	46,0	95,0	12,7	0,355
20	3/4"	75,0	55,0	115,0	17,5	0,535
25	1"	87,0	70,0	130,0	25,0	1,055
32	1.1/4"	102,0	74,0	130,0	30,5	1,680
40	1.1/2"	112,0	87,0	180,0	38,0	2,565
50	2"	136,0	96,0	180,0	49,0	4,000
65	2.1/2"	158,8	115,0	197,0	60,0	6,870
80	3"	174,7	161,0	222,5	75,0	10,435

GRÁFICO PRESSÃO X TEMPERATURA (Comportamento das Vedações)

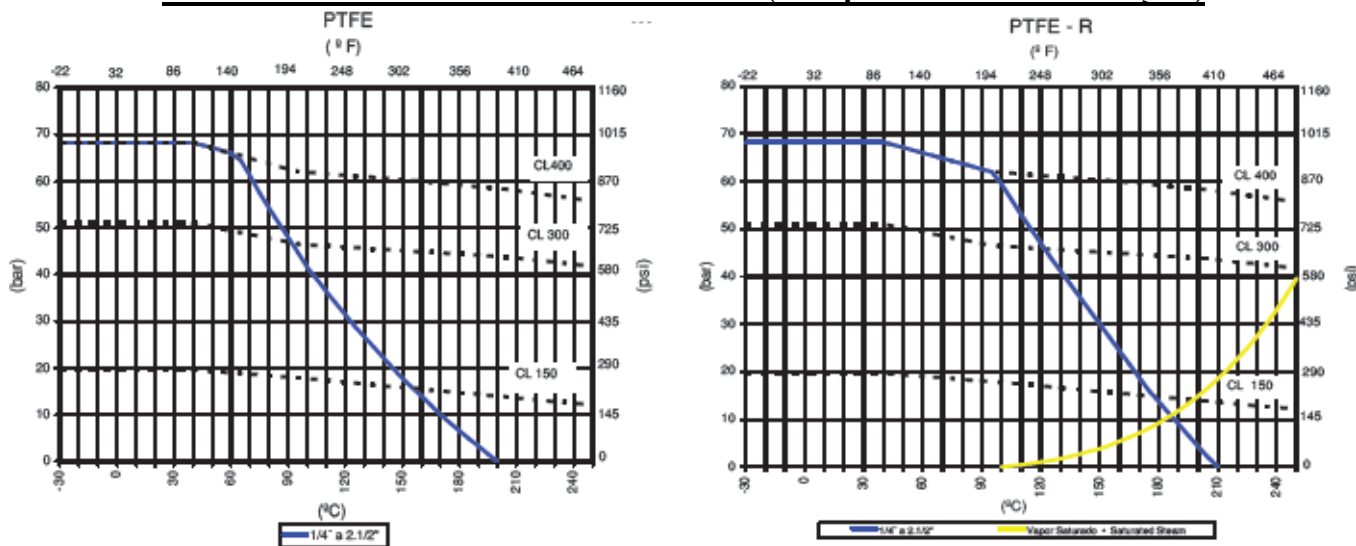


Figura	Corpo + Tampa	Esfera + Haste	Montagem	Vedações
VR9310-A	Aço carbono WCB	Aço inox CF8	Aço carbono WCB	PTFE ou PTFE-R
VR9310-I	Aço inox CF8	Aço inox CF8	Aço inox CF8	PTFE ou PTFE-R
VR9310-X	Aço inox CF8M	Aço inox CF8M	Aço inox CF8M	PTFE ou PTFE-R