

- Válvula esfera tripartida, flangeadas, classe 300 LBS.

Bitola		Dimensões (mm)					Peso Kg
DN	NPS	A	B	C	ØP		
15	1/2"	140,0	71,0	127,0	12,7	1,510	
20	3/4"	152,0	71,0	150,0	17,5	2,492	
25	1"	165,0	71,0	150,0	25,0	3,277	
40	1.1/2"	190,0	91,0	191,0	38,0	6,598	
50	2"	216,0	113,2	192,2	49,5	9,800	

GRÁFICO PRESSÃO X TEMPERATURA (Comportamento das Vedações)

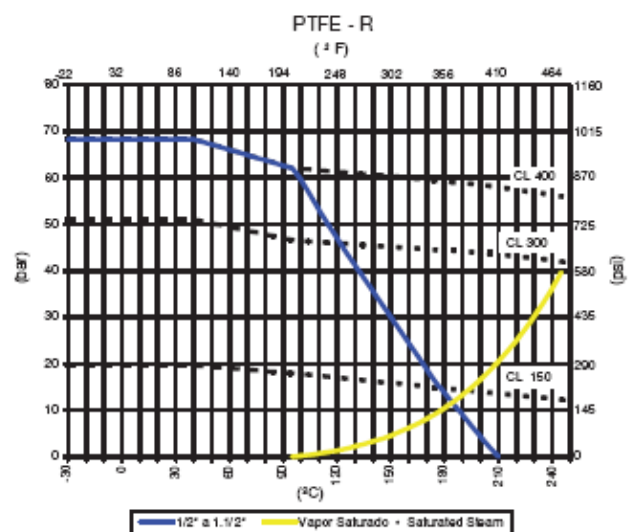
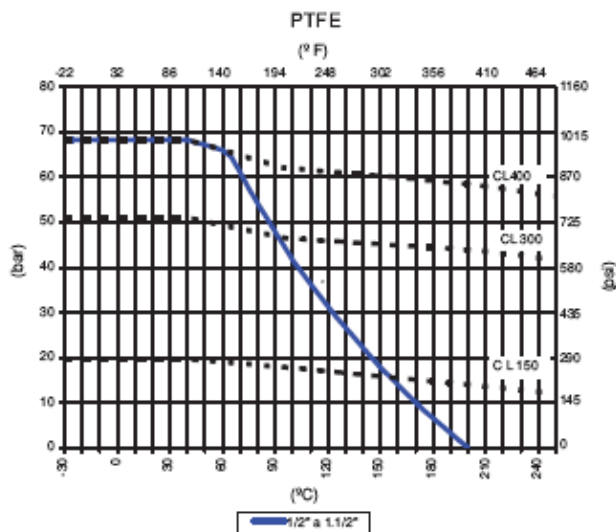


Figura	Corpo + Tampa	Esfera + Haste	Montagem	Vedações
VR9338-A	Aço carbono WCB	Aço inox CF8	Aço carbono WCB	PTFE ou PTFE-R
VR9338-I	Aço inox CF8	Aço inox CF8	Aço inox CF8	PTFE ou PTFE-R
VR9338-X	Aço inox CF8M	Aço inox CF8M	Aço inox CF8M	PTFE ou PTFE-R